


SERAGE

QUALITY RELIABILITY VISION



4 CHANNEL DVR FANLESS

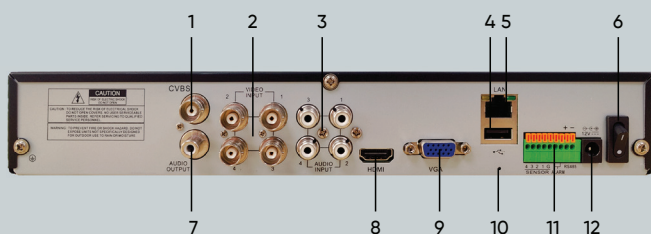

No.	Description	No.	Description
1	CVBS OUTPUT (SPOT)	7	AUDIO OUTPUT
2	CAMERA INPUT (BNC)	8	HDMI OUTPUT (MAIN)
3	AUDIO IN	9	VGA OUTPUT (MAIN)
4	USB PORT	10	RESET BUTTON (10SEC)
5	LAN NETWORK	11	ALARM IN/OUT
6	POWER SWITCH	12	12V DC POWER SUPPLY

KEY FEATURES

4CH Universal

Recording at up to 4K, 6fps/ch

Support TVI/AHD/CVI/Analogue + 2 IP – Total of 6 Cameras

4ch synchronous playback

4 Audio input, 1 output

USB 2.0 X 2 (for mouse and backup/upgrade)

HDMI, VGA & BNC CVBS output

Web-based management /CMS

4 Alarm input / 1 output

Support IOS & Android, Mobile/Tablets Free Application

1 SATA HDD, up to 8TB

DC 12V/2A



NDA (National Defense Authorization Act) compliant, refers to products that are "safe to use" by government agencies and enterprises.

SR5004D

Analog video-input

IP Video Input

IP Cam Inputs

Out

Composite Video Input

Compression

Display resolution

Speed

AI

Event

Playback function

Playback

Local

Web

Mobile App

Push notification

Password reset

BNC

VGA

HDMI

Ethernet

USB

Audio

HDD

RS485

Alarm Input/out

OSD Language

Dimension (WxDxH)

Input Voltage/Current

Power consumption
(excluding hard disk)

Operating Temperature

Humidity

4CH inputs

2ch, (only IP up to 6ch)

12Mbps – 36Mbps

Decrease one Analog channel can increase 6Mbps

Analog channel and digital channel can be converted

48Mbps

Up to 6ch (Analog video + IP video)

Audio: G.711a

Video: H.264/H.265

Analog: 8MP (15fps)

5MP (20fps)

4MP/1080P/720P/960H (30fps)

IP: 4K/4MP/1080P/720P

Single IP channel preview up to 4K 30 fps

Main-stream

Analog: 8MP:7fps(each ch)

5MP: 12fps(each ch)

4MP: 15fps(each ch)

1080P: PAL:25fps(each ch)/NTSC:30fps(each ch)

IP: PAL:25fps(each ch)/NTSC: 30fps(each ch)

Sub-stream

Max

PAL: 704*576:10fps(each ch)

NTSC: 704*480:10fps(each ch)"

PID – Perimeter Intrusion Detection

LCD – Line Crossing Detection

PD&VD – Human&Vehicle Detection"

MD (Sensitivity Level 1~8)

Video loss

Beep, Email, Push notification to Mobile APP

Fast forward / backward (2x, 4x, 8x, 16x)

Slow forward (1/2x, 1/4x, 1/8x, 1/16x)

8MP: 28fps (Max 4CH playback)

5MP: 48fps (Max 8CH playback)

4MP: 60fps (Max 8CH playback)

1080P: 120fps (Max 8CH playback)

UI5.0

IE10/11

Safari V12.1 above

Firefox V.52 above

Google chrome V.57 above

Edge V.79 above

SERAGE

Yes

Factory Reset Button: Press 10 seconds

1 (704*576)

1(1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080)

1(1024*768, 1280*720, 1280*1024, 1440*900, 1920*1080

2560*1440, 3840*2160/EDID)

1 RJ45 100/100 Base-T

USB 2.0*1 (front)

USB 2.0*1 + (rear)

4 in /1 out

1 SATA HDD, up to 8TB

1

4 in /1 out

English/French/Spanish/Portuguese/German

Italian/Greek/Danish/Finnish/Russia/Hebrew/Turkish

Bulgarian/Arabic/Korean/Japanese/Thai/Hindi

Romanian/Dutch/Polish

300 X 220 X 53mm

DC12V/2A

4.7W

-10°C~+50°C (14°F ~ 122°F)

Less than 90%RH